

STRAPPING HEAD
MODEL: CFL-2



Cyklop - Strapping Head CFL-2


The heart of every strapping machine is the strapping head. Depending crucially on its performance and specification to how safe a load is required to be during transport.

Our newest, innovative strapping head is equipped with – among other things – a drive concept that is not equipped with expanding couplings and with only a single belt, thanks to direct drive.

The result is an unprecedented reproducibility of tension and joint strength, which is always guarantees and optimum holding power and a very low susceptibility to wear.

Advantages:

- Equipped with innovative, intelligent direct drive
- High reproducibility of strap tensioning and sealing strength
- No exchange of tension couplings necessary
- Long stand time due to an innovative lubricating system
- Excellent energy efficiency and therefore environmentally-friendly
- Friction weld seal – no unpleasant odours as there are no vapours
- Compact dimensions
- Service- and maintenance-friendly
- Simple exchangeable sealer within minutes
- Some wear parts can be exchanged without dismantling
- Made in Germany
- According to machine regulations: 2006/42/EG

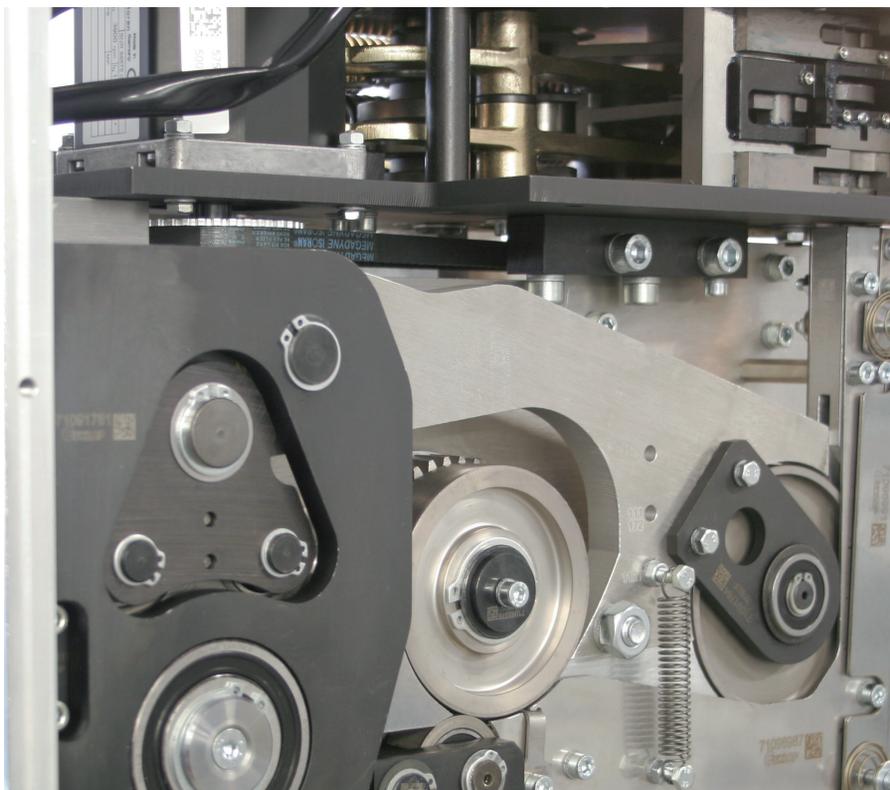

Technical Data:

Strap feed/strap retreat: 3.9 m/s
Strap tensioning: 200 up to 2,200 N
Infinitely variable
(depending on strap width and thickness)

Elektric:
Operating voltage: 48 V DC
Total connection: 0.5 kW
Control voltage: 24 V DC

PET and PP straps:
Width: 9 - 12.0 mm
Thickness: 0.4 - 0.8 mm
Dimensions (L/W/H): Approx. 395/276/455 mm
Weight: Approx. 59 kg



WWW.CYKLOP.NL

038-46 75 800

CYKLOP Nederland BV
B. Franklinstraat 5
8013 NC Zwolle
info@cyklop.nl

CYKLOP
INTERNATIONAL

THE
STRAPPING
COMPANY

100 YEARS
1912/2012